ASSEMBLY INSTRUCTIONS

MODEL#:RL1070B

NOTE:

Only the technical personnel can be allowto fix and maintain.

IMPORTANT !

Make sure that the power is switch off at the electricity mains supply before commencing work.

FIXING INSTRUCTIONS

. Open parts according to the bag as shown in figure B shows, installed angs Taiwan screw, and should be fixed to the ceiling in the right place.
. Ground Connection (See picture 1): there are one tapping hole & two imples.
Find the supply ground wire (2) on the green ground screw (15) and then put t into
apping hole. Connect the fixture ground wire (3) with supply ground wire 2) by connecting terminal (12). Caution: DO NOT connect ground wire with upply power wire.
. Connect fixture supply wire with power supply wire . Caution: Remember o distinguish the positive and negative charges. (See picture 2)
. Push canopy up to the ceiling and Lock cuttlefish nut
. Hang crystal.

REPLACEMENT BULB

o not exceed the maximum wattage.
ight bulbs recommended: RL1070B-8 -E12 8x60W Max. Type B.

LEANING CARE

lean with a soft dry cloth.

AFETY INFORMATION

. Lamp used must in rated voltage, and do not touch the bulb with bare hands
. Always switch off the electricity supply and allow to cool for 10 minutes efore changing the light bulbs.
. If the external cables have been demaged, Pls change or repair by anufacturer or service agency or professional electrician, In order to void the danger.

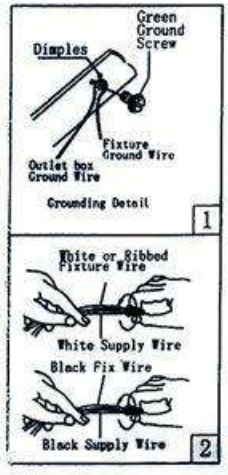

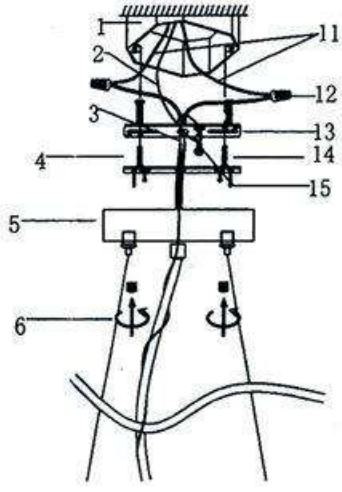

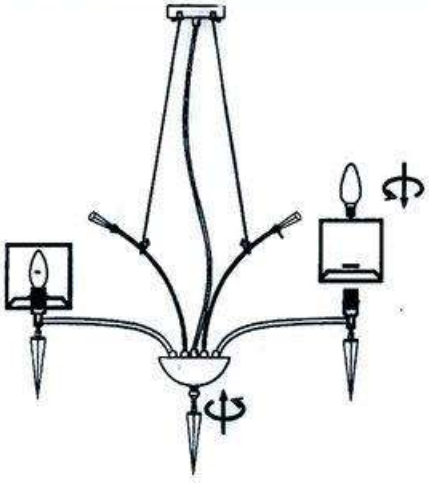

A